


## Размеры электродвигателей 7A IM:2181/3681 (B34) Лапы/малый фланец

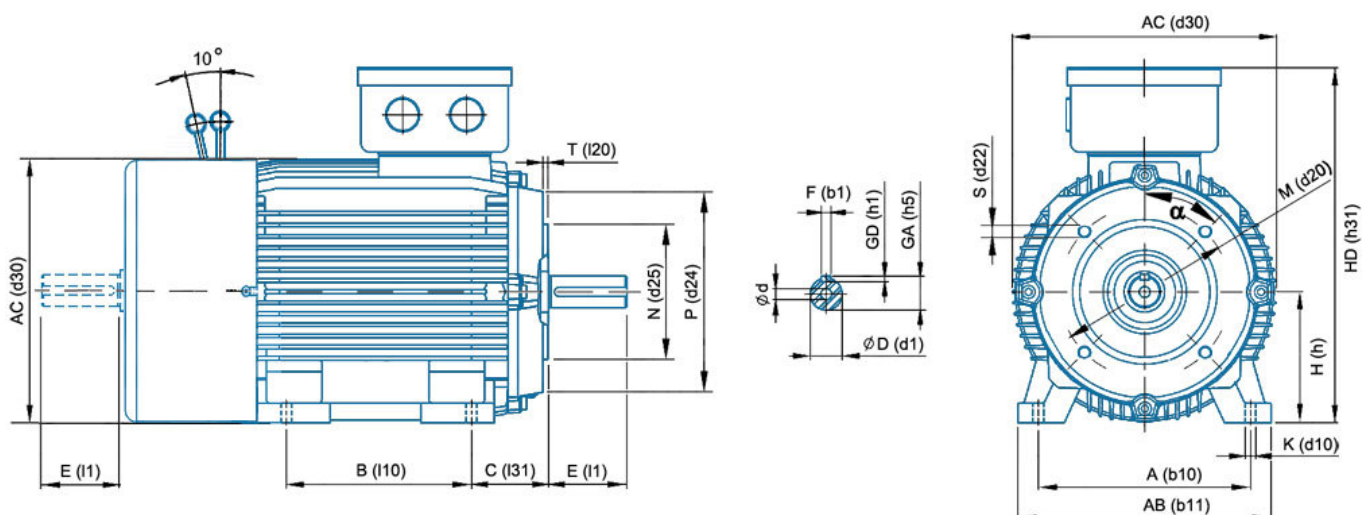

Наименование	кол-во полюсов	H	D	P	M	N	S	n	T	A	B	AC	AB	BB	K	d	E	C	GA	GD	F	HD
		h	d1	d24	d20	d25	d22	n	l20	b10	l10	d30	b11	l11	d10	d	l1	l31	h5	h1	b1	h31
7A56A-E(E2)	2, 4	56	11	80/105	65/85	50/70	M5/M6	4	2.5/2.5	90	71	110(129)	113	90	5.8	M4	23	36	12,5	4	4	165
7A56B-E(E2)	2, 4	56	11	80/105	65/85	50/70	M5/M6	4	2.5/2.5	90	71	110(129)	113	90	5.8	M4	23	36	12,5	4	4	165
7A63A-E(E2)	2, 4, 6	63	14	90/120	75/100	60/80	M5/M6	4	2.5/3.0	100	80	125(142)	124	102	5.8	M4	30	40	16	5	5	180
7A63B-E(E2)	2, 4, 6	63	14	90/120	75/100	60/80	M5/M6	4	2.5/3.0	100	80	125(142)	124	102	5.8	M4	30	40	16	5	5	180
7A71A-E(E2)	2, 4, 6	71	19	105/140	85/115	70/95	M6/M8	4	2.5/3.0	112	90	140(160)	155	120	7	M6	40	45	21,5	6	6	205
7A71B-E(E2)	2, 4, 6, 8	71	19	105/140	85/115	70/95	M6/M8	4	2.5/3.0	112	90	140(160)	155	120	7	M6	40	45	21,5	6	6	205
7A80MA-E(E2)	2, 4, 6, 8	80	22	120/160	100/130	80/110	M6/M8	4	3.0/3.5	125	100	157(180)	160	131	10	M8	50	50	24,5	6	6	230
7A80MB-E(E2)	2, 4, 6, 8	80	22	120/160	100/130	80/110	M6/M8	4	3.0/3.5	125	100	157(180)	160	155	10	M8	50	50	24,5	6	6	230
7A90L-E(E2)	2, 4, 6, 8	90	24	140/160	115/130	95/110	M8	4	3.0/3.5	140	125	175(198)	176	170	10	M8	50	56	27	7	8	245
7A90LB-E(E2)	8	90	24	140/160	115/130	95/110	M8	4	3.0/3.5	140	125	175(198)	176	170	10	M8	50	56	27	7	8	245
7A100S-E(E2)	2, 4	100	28	160/200	130/165	110/130	M8/M10	4	3.5/3.5	160	112	198(226)	205	180	12	M10	60	63	31	7	8	275
7A100L-E(E2)	2, 4, 6, 8	100	28	160/200	130/165	110/130	M8/M10	4	3.5/3.5	160	140	198(226)	205	185	12	M10	60	63	31	7	8	275

Обозначения монтажного положение двигателей в соответствии с IEC 60034-7.

Монтажное положение	Обозначения			Габариты двигателей	Монтажное положение	Обозначения			Габариты двигателей
	CEI 2-14	IEC 60034-7				CEI 2-14	IEC 60034-7		
		I	II				I	II	
	B3/B14	IM B34	IM 2081	56-160		V5/V18	IM V58	IM 2111	56-132
			IM 2181						
			IM 3681						
	B3/B14	IM B34	IM 2182	56-160		V6/V19	IM V69	IM 2131	56-132
			IM 3682						
			Два вала						